

# Fault Detection and Restoration Application for Wireless Sensor and Actor Networks

N.Bala Maruthi Kumar<sup>1</sup>, K.Reddy Madhavi<sup>2</sup>

PG scholar, CSE, Sri Sai Institute of Technology and Sciences, Rayachoti, A.P, INDIA<sup>1</sup>

Associate Professor, Dept of CSE, Sri Sai Institute of Technology and Sciences, Rayachoti, A.P, India<sup>2</sup>

**Abstract:** In this paper, a Least-Disruptive topology Repair (LeDiR) algorithmic rule is presented. LeDiR may be a localized and distributed algorithmic rule that leverages existing route discovery activities within the network and imposes no extra pre-failure communication overhead. Wireless Sensor and Actor Networks (WSANs) is a network formed with the group of sensors and actors. Those sensors and actors are connected by wireless medium to perform distributed sensing and exploit tasks. In such a network, sensors gather data concerning the physical world, whereas actors take choices and so perform acceptable actions upon the surroundings that permit remote, machine-controlled interaction with the surroundings. This paper overcomes these shortcomings and presents a Least-Disruptive topology Repair (LeDiR) algorithm. LeDiR relies on the local view of a node about the network to devise a recovery plan that relocates the least number of nodes and ensures that no path between any pair of nodes is extended. LeDiR is a localized and distributed algorithm that leverages existing route discovery activities in the network and imposes no additional pre-failure communication overhead. The performance of LeDiR is analysed mathematically and validated via extensive simulation experiments.

**Keywords:** LeDiR, WSANs, DCR, DARA

## I. INTRODUCTION


Recent years Wireless sensing element and Actor Networks square measure gaining growing interest due to their suitability for mission vital applications that need autonomous and intelligent interaction with the setting. Samples of these applications embody fire observance, disaster management, search and rescue, security police investigation, field intelligence operation, house exploration, coast and border protection, etc.

WSAN comprises varied miniaturized stationary sensors and fewer mobile actors. The sensors function wireless knowledge acquisition devices for the additional powerful actor nodes that method the sensing element readings and proposes associate applicable varied miniaturized stationary sensors and fewer mobile actors. The sensors function with wireless knowledge acquisition devices for the additional powerful actor nodes that method the sensing element readings associated proposes an applicable response.

For example, sensors could find a hearth associated trigger a response from associate actor that has a device. Robots and pilotless vehicles area unit example actors in observe. Actors work autonomously and collaboratively to attain the appliance mission. Given the cooperative actors operation, a powerfully connected inter-actor configuration would be needed in any respect times. Failure of 1 or multiple nodes could partition the inter-actor network into disjoint segments. Consequently, associate inter-actor interaction could stop and therefore the network becomes incapable of delivering a timely response to a significant event. Therefore, recovery from associate actor failure is of utmost importance.

The remote setup during which WSANs usually serve makes the readying of extra resources to switch

failing actors impractical, and emplacement of nodes becomes the simplest recovery possibility. Distributed recovery is going to be terribly difficult since nodes in separate partitions won't be ready to reach one another to coordinate the recovery method.

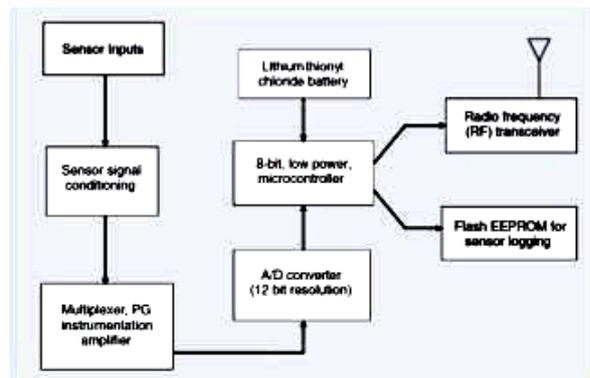

**Wireless sensor node functional block diagram**

Fig 1. Wireless Sensor node function block diagram.

Therefore, up to date schemes found within the literature re-require each node to take care of partial data of the network state. To avoid the excessive state-update overhead and to expedite the property restoration method, previous work depends on maintaining one- or two-hop neighbor lists and predetermines some criteria for the node's involvement within the recovery.

Most of the prevailing approaches within the literature are strictly reactive with the recovery method initiated once the failure of "F" is detected. the most plan is replace the unsuccessful node "F" with one in every of its neighbours

or move those neighbours inward to autonomously mend cut topology within the neighbourhood of F.

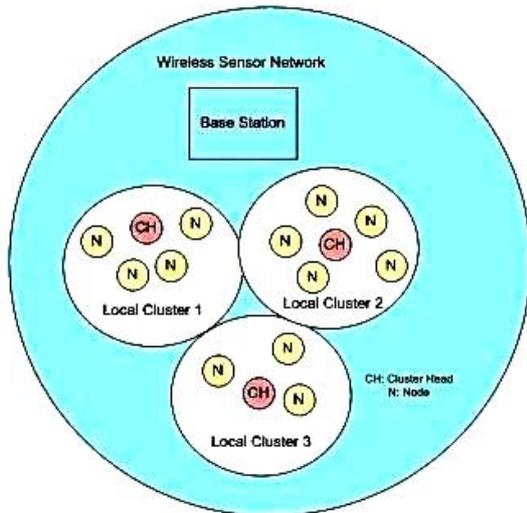


Fig: 2 wireless sensor and actor network setup

## II. SYSTEM MODEL AND PROBLEM STATEMENT

For restoring network property in partitioned off WSANs variety of schemes has recently been projected. All of those schemes have targeted on restoring cut links while not considering the impact on the length of pre-failure knowledge ways.

Some schemes recover the network by positioning the prevailing nodes, whereas others fastidiously place further relay nodes. On the opposite hand, some work on device relocation focuses on metrics aside from property, e.g., coverage, network longevity, and quality safety, or to self-spread the nodes once non-uniform readying.

Existing recovery schemes either impose high node relocation overhead or extend a number of the inter-actor knowledge ways.

Existing recovery schemes targeted on restoring cut links while not considering the impact on the length of pre-failure knowledge ways.

### Proposed system:

In this project, we have a tendency to gift a Least-Disruptive topology Repair (LeDiR) rule. LeDiR depends on the native read of a node regarding the network to {plan|plot} a recovery plan that relocates the smallest amount range of nodes and ensures that no path between any try of nodes is extended.

LeDiR could be a localized and distributed rule that leverages existing route discovery activities within the network and imposes no further pre-failure communication overhead. The performance of LeDiR is simulated victimization NS2 machine.

The goal for LeDiR is to restore connectivity without expanding the length of the shortest path among nodes compared to the pre-failure topology. The main idea for LeDiR is to pursue block movement stead of individual

nodes in cascade. Block diagram of LeDiR Algorithm is shown as follows.

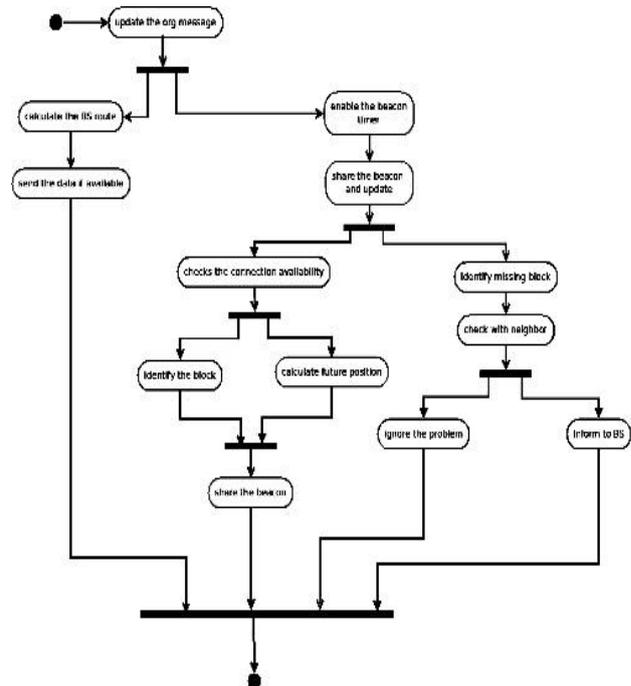


Fig 3: Block Diagram of LeDiR Algorithm

### Pseudocode for LeDiR Algorithm:

```

1.LeDiR(j)
2.IF node j detects a failure of its neighbor F
3.IF neighbor F is a critical node
4.IF IsBestCandidate(j)
5.Notify_Children(j)
6.J moves to the position of neighbor F;
7.Moved_Once←TRUE
8.Broadcast(Msg(*RECOVERED*));
9.Exit;
10.ENDIF
11.ENDIF
12.ELSE IF j receives (a) notification message (s) from F
13.IF Moved_Once // Received Msg(*RECOVERED*)
14.EXIT
15.ENDIF
16.NewPosition←Compute_newPosition(j);
17.IF New Position!=CurrentPosition(j);
18.Notify_Children(j);
19.J moves to NewPosition;
20.Moved_Once←TRUE;
21.ENDIF
22.ENDIF
IsBestCandidate(j):
23.//check whether j is the best candidate for tolerating the failure
24.NeighborList[]←GetNeighbor(F)by accessing column F in SRT;
25.Smallest BlockSize←Number of nodes in the network
26.BestCandidate←j;
27.For each node l in the NeighborList[ ]
//use the SRT after excluding the failed node to find the set of
    
```

```
// reachable nodes
28.Number of reachable nodes ←0;
29.FOR each node K in SRT excluding i and F
30.Retrieve shortest path from I to k by using SRT
31.IF the retrieved shortest path does not include node f
32.No of reachable nodes←No of reachable nodes+1;
33.END IF
34.END FOR
35.IF Number of reachable nodes <Smallest BlockSize
36.Smallest Blocksize←Number of reachable nodes;
37.BestCandidate←i;
38.END IF
39.END FOR
40.IF Best Candidate—j
41.Return TRUE;
42.ELSE
43.Return FALSE;
ENDIF
```

#### Advantages:

It is nearly insensitive to the fluctuation within the communication vary. LeDiR conjointly works all right in heavy networks and pays near best performance even once nodes square measure part conscious of the configuration.

### III. RELATED WORK

A number of schemes have recently been planned for restoring network property in divided WSANs [2]. All of those schemes have centered on restoring cut off links while not considering the impact on the length of pre-failure information methods. Some schemes recover the network by placement the prevailing nodes, whereas others strictly place extra relay nodes.

Like our planned DCR algorithmic program, DARA [7] strives to revive property lost as a result of failure of cut-vertex. However, DARA needs additional network state in order to make sure convergence. Meanwhile, in PADRA [8], determine a connected dominating set (CDS) of the full network so as to discover cut-vertices. Although, they use a distributed algorithmic program, their resolution still needs 2-hop neighbor's data that will increase electronic communication overhead.

Another work planned in [9] conjointly uses 2-hop data to discover cut-vertices. The planned DCR algorithmic program depends solely on 1-hop data and reduces the communication overhead. Though RIM [10], C3R [11] and tape machine [12] use 1-hop neighbor data to revive property, they are strictly reactive and don't differentiate between crucial and non-critical nodes.

Whereas, DCR could be a hybrid algorithmic program that proactively identifies crucial nodes and designates for them applicable backups. The prevailing work on synchronic node failure recovery planned in [8] could be a mutual exclusion mechanism known as [13] so as to handle multiple synchronic failures in a much localized manner.

Our planned approach differs from MPADRA in multiple aspects. Whereas, our approach solely needs 1-hop data and every crucial node has just one backup to handle its failure.

## IV. IMPLEMENTATION

### 1. Failure Detection

Actors can sporadically send heartbeat messages to their neighbors to make sure that they're useful, and conjointly report changes to the one-hop neighbors. Missing heartbeat messages will be accustomed observe the failure of actors.

After that it's simply check whether or not failing node is vital node or not. Critical node suggests that if that node failing it type disjoint block within the network.

### 2. Smallest block identification

In this step we have to seek out smallest disjoint block. If it's tiny then it'll scale back the recovery overhead within the network. The tiniest block is that the one with the smallest amount variety of nodes

By finding the accessible set of nodes for each direct neighbour of the failing node then selecting the set with the fewest nodes.

### 3. Substitution faulty node

If node J is that the neighbour of the failing node that belongs to the tiniest block J is taken into account the B.C. to interchange the faulty node Since node J is taken into account the entire node of the block to the failing vital node (and the remainder of the network) We talk over with it as "parent."

A node could be a "child" if it's 2 hops Away from the failing node, "grandchild" if 3 hops Away from the failing node In case over one actor fits the characteristics of a B.C. (Best Candidate), the highest actor to the faulty node would be picked as a B.C... Any further ties are resolved by choosing the actor with the smallest amount node degree. At last the node ID would be accustomed resolve the tie

### 4. Children movement:

When node J moves to interchange the faulty node, presumably a number of its kids can lose direct links thereto. We don't need this to happen since some defamation methods could also be extended. This rule don't need to increase the link if a toddler obtains a message that the parent P is moving, the kid then notifies its neighbours (grand children of node P) and travels directly toward the new location of P till it reconnects with its parent once more

## V. CONCLUSION

Wireless Sensor and Actor Networks (WSANs) is initiated to obtain improving attention due to their potential in many real-time applications. New distributed LeDiR algorithms that re-establish connectivity by careful replacing of nodes with their neighbouring nodes is proposed. A significant problem in mission critical WSANs is defined in this paper, that is, restoring network connectivity after node failure without expanding the length of data paths. LeDiR also works very hard in heavy

networks and pays close to optimal performance even when nodes are partly aware of the network topology. LeDiR can recover from a single node failure at a time. Generally, simultaneous node failures are very improbable unless a part of the deployment area becomes subject to a major hazardous event, e.g., hit by a bomb. Considering such a problem with collocated node failure is more complex and challenging in nature. In the future, we plan to investigate this issue. Our future plan also includes factoring in coverage and ongoing application tasks in the recovery process and developing a tested for evaluating the various failure recovery schemes.

perusing Ph.D. in Computer Science and Engineering from JNTU Anantapuramu , she presented number of paper in National and International conferences and placed in ACM, Springer digital libraries and published number of papers in various international Journal's from KOREA, USA, INDIA. She is a life member of CSI, IETE, and ISTE and attended various workshops, seminars, organized National Workshops, Symposiums and international conferences and member of R&D cell.

## REFERENCES

- [1] Tamboli, N and Younis, M. Coverage-aware connectivity restoration in mobile sensor networks. In: Proceedings of the IEEE international conference on communications (ICC 2009), Dresden, Germany; June 2009.
- [2] Imran, M, Younis, M, Said, AM, Hasbullah, H. Volunteer-instigated connectivity restoration algorithm for wireless sensor and actor networks. In: Proceedings of the IEEE International Conference on Wireless Communications, Networking and Datarmation Security (WCNIS 2010), Beijing, China; June 2010.
- [3] Akkaya K, Senel F, Thimmapuram A, Uludag S. Distributed recovery from network partitioning in movable sensor/actor networks via controlled mobility. IEEE Transactions on Computers 2010;59(2):258–71.
- [4] MilenkoJorgic , IS, Hauspie, Michael,," Simplot-ryl, David. Localized algorithms for detection of critical nodes and links for connectivity in ad hoc networks. In: Proceedings of the 3rd annual IFIP mediterranean ad hoc networking workshop, Med-Hoc-Net, Bodrum, Turkey; June 2004.
- [5] Li, N Xu S, Stojmenovic, Ivan. Mesh-based sensor relocation for coverage main-tenance in mobile sensor networks. In: Proceedings of the 4th international conference on ubiquitous intelligence and computing (UIC 2007), Hong Kong, China; July 2007.
- [6] Muhammad Imran a,n, Mohamed Younis b, Abas Md Said c, Halabi Hasbullah c , "Localized motion-based connectivity restoration algorithms for wireless sensor and actor networks", Journal of Network and Computer Applications 35 (2012) 844–856
- [7] F. Akyildiz and I. H. Kasimoglu, "Wireless sensor and actor networks: Research challenges," Ad Hoc Netw. J., vol.2, no. 4, pp. 351–367, Oct. 2004.
- [8] M. Younis and K. Akkaya, "Strategies and techniques for node placement in wireless sensor networks: A survey," J.Ad Hoc Netw., vol. 6, no. 4, pp. 621–655, Jun. 2008.
- [9] A. Abbasi, M. Younis, and K. Akkaya, "Movement-assisted connectivity restoration in wireless sensor and actor networks," IEEE Trans. Parallel Distrib. Syst., vol. 20, no. 9, pp. 1366–1379, Sep. 2009.
- [10] M. Younis, S. Lee, S. Gupta, and K. Fisher, "A localized self-healing al-gorithm for networks of moveable sensor nodes," in Proc. IEEE GLOBE-COM, New Orleans, LA, Nov. 2008, pp. 1–5.

## BIOGRAPHIES



**Mr.N.Bala Maruthi Kuamr** received the B.Tech. Degree in Computer and Science Engineering from JNT University, Anantapur, India and Presently pursuing M.Tech Computer and Science Engineering from JNT University, Anantapuram ,India.



**Mrs. K.ReddyMadhavi** completed B.tech degree in Mechanical Engineering from SV University,Tirupathi,in 2004,and M.tech in Computer Science from JNTU Hyderabad in 2007 and